

STRUCTURAL HEALTH MONITORING 2005

Advancements and Challenges for Implementation

Edited by

Fu-Kuo Chang

*Department of Aeronautics and Astronautics
Stanford University, Stanford, CA 94305*

Proceedings of the 5th International Workshop on Structural
Health Monitoring, Stanford University, Stanford, CA
September 12–14, 2005

Sponsors:

Air Force Office of Scientific Research

Army Research Office

National Science Foundation



DEStech Publications, Inc.

Sensor Development for Strategically Tuned Absolutely Resilient Structures (STARS)

J. A. GILBERT, K. R. BISZICK, H. A. TOUTANJI, T. K. OOI
and S. A. MAROTTA

ABSTRACT

This paper describes some of the steps being taken to incorporate sensors into a new generation of composites fabricated by placing a low modulus, lightweight matrix over multiple layers of a relatively stiff reinforcement. These remarkable concoctions called Strategically Tuned Absolutely Resilient Structures (STARS) are designed to store strain energy in the form of elastic deformation that can be released in a controlled fashion as work or kinetic energy.

STARS are designed to resist reverse loadings created by bending and torsion and can be highly stressed and deformed to store large amounts of elastic strain energy. When the structural response is modified as the service loads are decreased, the stored energy can be released in a controlled fashion to do useful work.

INTRODUCTION

Strategically Tuned Absolutely Resilient Structures (STARS) are a new generation of composites fabricated by placing a low modulus, lightweight matrix over multiple layers of a relatively stiff reinforcement [1]. These remarkable concoctions are designed to morph based on the strength, stiffness, and the position of the component materials in the composite section and their ability to store and release energy depends upon a complex interaction between the shape, modal response, and the forcing function applied to drive the structure [2].

John A. Gilbert, University of Alabama in Huntsville, Huntsville, AL 35899, U.S.A.
Kirk R. Biszick, Optechnology, Inc., 7901 Smoke Rise Road, Huntsville, AL 35802-3917,
U.S.A.
Houssam A. Toutanji, University of Alabama in Huntsville, Huntsville, AL 35899, U.S.A.
Teng K. Ooi, US Army Aviation and Missile Research, Development and Engineering Center,
Redstone Arsenal, AL 35898, U.S.A.
Stephen A. Marotta, US Army Aviation and Missile Research, Development and Engineering
Center, Redstone Arsenal, AL 35898, U.S.A.

STRUCTURAL DESIGN AND STRESS TRANSFER

STAR structures are fabricated from composite materials with constituents that are purposefully stressed and deformed to the largest extent possible so that the maximum amount of strain energy can be stored and released. Their design relies on large differences in stiffness between the constituents in the composite section to drive the internal stress from a flexible matrix to relatively stiff reinforcement.

In most cases, materials are strategically placed, symmetrically through the thickness, to form an “adaptive” section that reacts similarly when mechanical loadings are reversed. This stress transfer can be visualized using the method of photoelasticity by observing the isochromatic fringe patterns shown in Figure 1 [3].

All four beams have a constant thickness, and each beam is subjected to the same bending moment. The distribution and number of fringes are directly proportional to the stress. The heavy black fringe in each beam represents the neutral axis that passes through the centroid of the section. The stress varies linearly with depth: compression on one side, tension on the other.

The beam situated second from the top is a 2.54 cm (1 in.) deep control standard and represents an unreinforced, homogeneous beam with a matrix having an elastic modulus of 2.5 GPa (360 ksi). The maximum stress is 1.50 MPa (218 psi). The top beam is only 1.91 cm (0.75 in.) deep and illustrates that the maximum stress [2.76 MPa (400 psi)] becomes much higher when the depth is smaller.

A 0.64 mm (0.025 in.) thick, 9.5 mm (0.375 in.) wide, steel strip is bonded to the lower surface of the beam situated third from the top. The maximum stress in the plastic is 751 kPa (109 psi), half that found in the control standard. Finally, the bottom beam has steel strips bonded on both the top and bottom faces. The isochromatic fringe pattern in the plastic is barely visible and corresponds to a maximum stress of only 103 kPa (15 psi). This value is over fourteen times less than that in the control standard, clearly indicating that the stress has been driven from the plastic (matrix) to the steel (reinforcement).

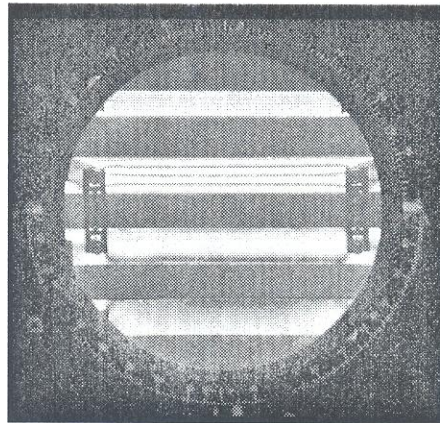


Figure 1. The bottom beam represents an “adaptive” section used to fabricate STARS.

In this case, the stiffness ratio between the steel and matrix is approximately 83, typical of that found in today's common advanced composite materials made of continuous fibers, either graphite or Kevlar®, suspended in a polymeric matrix, typically an epoxy of some type. The technology underlying these materials has been developed over the past sixty years and the materials have been widely used in numerous manned and unmanned aircraft structural applications primarily due to their high strength-to-weight and/or stiffness-to-weight ratio.

While advances in such composite materials have been steady, there have been relatively few revolutionary changes of late. But the investigation and development of STARS, designed with much higher stiffness ratios by fabricating matrices based on unique hybrid blends of inorganic and organic components, has the potential to revolutionize both structural design and tactical military strategies.

STARS SCENARIO

Figure 2 illustrates how STARS can be designed to function as energy transfer devices. In this case, the structure is driven to controlled resonance by using a forcing function having a frequency close to the structure's natural frequency. Sensors are used to monitor the structural performance. The objective is to maintain structural integrity by keeping all materials within the elastic range.

Using adaptive reinforcement can prevent damage. Control elements may be employed to adjust the dynamic response of the STAR structure in real time.

The overall design goal is to make STARS absolutely resilient so that strain energy, stored as elastic deformation, can be completely recovered and efficiently converted into useful work or energy. They are unique in that they can sustain large deformations without compromising structural integrity making it possible to utilize relatively crude and insensitive experimental techniques for structural health monitoring. This also makes STARS ideal candidates for structural morphing [4].

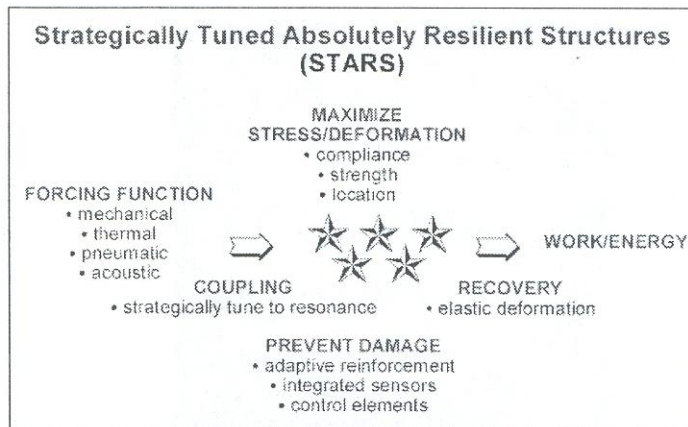


Figure 2. "STARS" can be used for energy transfer.

STRUCTURAL HEALTH MONITORING USING RRAPDS

In prior STARS research, emphasis was placed on the design and fabrication of new materials with specific microstructure, constitution, and properties. STARS technology was demonstrated in structures that had thin [5-7.5 mm (0.2-0.3 in.) thick] composite sections fabricated by placing a flexible matrix over multiple layers of relatively stiff graphite fiber mesh [5-7]. Efforts are currently underway to monitor the structural health of these STARS by making modifications to the Army's **Remote Readiness Asset Prognostic and Diagnostic System (RRAPDS)** [8].

RRAPDS is being developed to provide an integrated system transparent to the war fighter that delivers advanced diagnostics/prognostics and monitors health/condition while an asset (i.e., missile) is tactically deployed, in storage, and/or being transported [9,10].

As illustrated in Figure 3, the RRAPDS concept consists of an assembly of low-power sensors located on the weapon system to collect environmental data, a processor termed the Asset Electronics Package to autonomously control RRAPDS operation, a power source capable of ten or more years of continuous system life, a capability to transmit real-time data, and the necessary tools to provide seamless user interfaces.

For STARS applications, on-line health monitoring and smart diagnostics/prognostics strategies will lead to significant savings in the total life cycle costs by improving a structure's reliability, maintainability, survivability, and availability. RRAPDS will allow for real-time access of source data and, in military applications, provide critical information needed for reduced sustainment costs and enhanced readiness. Sensor data analyzed by data mining algorithms and predictive trending has the potential to extend life and save millions in maintenance costs. Over time, data collected can be used to refine structural designs and improve reliability, resulting in an improved overall life cycle.

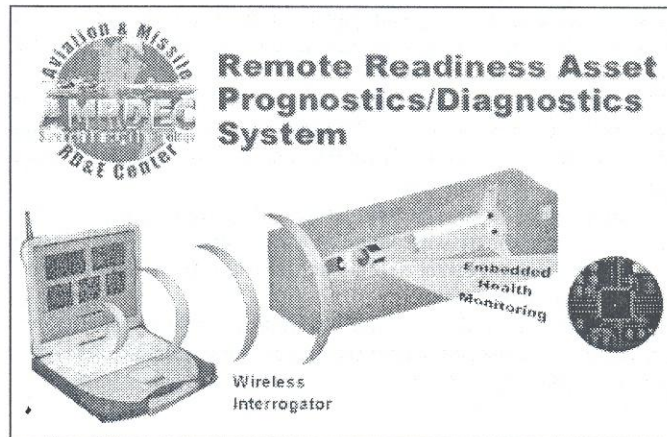


Figure 3. RRAPDS features wireless communication links and embedded sensors.

STRUCTURAL INFORMATION SYSTEM

We are currently integrating/encapsulating sensors into STARS and developing a sophisticated information system to monitor them. The advantages of this approach are that the information system can be used immediately after placement of the matrix to monitor the cure cycle; to identify anomalies or to quantify bond strength once the constituents have cured; to verify performance during calibration procedures performed prior to service; to measure changes in the environment surrounding the structure; and, to accurately monitor the structural system in real-time under load conditions throughout its lifetime.

For the thin plates developed in earlier studies [5-7], we are embedding Bragg sensors along with the reinforcing fibers. In many cases, we have found it beneficial to install sensors on the outer surfaces. Although Bragg sensors can be used for this purpose, strain gages have proven advantageous.

In the case of thick plates and beam elements, we are reinforcing the structure using hollow graphite tendons equipped with sensors bonded at critical locations on their inner walls. The leads to the sensors are fed through the cavities in the reinforcement so that strain can be easily measured free from sensor-lead effects.

In contrast to other systems designed to pinpoint structural defects in more conventional reinforced structures [11], the proposed monitoring system is intended to keep the stress in the reinforcement below yield, and prevent cracks from occurring in the surrounding matrix. This strategy is significantly different from the norm, since our goal is to minimize structural damage by maintaining resilience.

INTEGRATED SENSING

The cross section shown in Figure 4 illustrates some of the other possibilities that we are currently exploring. In this example, graphite tape [see No. 1 on the figure] is wrapped around a mandrel [No. 2] having the geometry required to accommodate embedded sensors. The mandrel could either be removed or employed to add strength. It could also be designed to act as an optical wave-guide for light transmission.

Optical fiber(s) [No. 3] could be embedded in the material to provide integrated sensing or access to discrete sensors. The core could be hollow so that lead wires/optical fibers fed through it [No. 4] would be environmentally protected as they convey information to and from the sensors.

The hollow core could be used to gain optical access to critical areas on which pressure sensitive paint [No. 5] was applied. An outer sheath [No. 6] could be designed to act as an environmental sensor, or, as a tool for monitoring the bond strength and the behavior of the matrix.

Our work combines a novel design concept with proven sensor technologies and is expected to result in cost effective, easily serviceable, safe, reliable, survivable, and efficient structural systems.

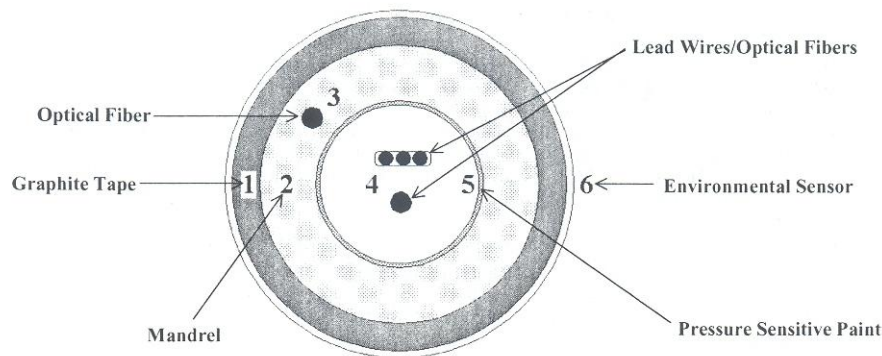


Figure 4. Cross-section of the reinforcement.

CONCLUSIONS

The on-line health monitoring and smart diagnostics/prognostics strategies discussed above are designed to improve the readiness and performance of STARS and will lead to significant savings in the total life cycle costs by improving a structure's reliability, maintainability, and survivability.

Some STARS are being targeted for use in weapons systems (missiles, munitions, land vehicles, helicopters, unmanned air vehicles, etc.) because the materials used to build them are inert and relatively insensitive to corrosion, nuclear bombardment, and electromagnetic radiation. Incorporating sensors into these systems is an extraordinary technology that provides ample warning that structural integrity is being compromised. The approach also allows the structure's dynamic performance to be quantified.

This unique design strategy is expected to have a positive long-term impact on U.S. productivity and will provide revolutionary new tools for planning, designing, and maintaining civil and military installations and facilities.

ACKNOWLEDGEMENT

Optechnology, Inc. and the University of Alabama in Huntsville conducted portions of this work under Army Contract No.W31P4Q-05-C-R103.

REFERENCES

1. Gilbert, J.A., Ooi, T.K., Biszick, K.R., Matotta, S.A., Vaughan, R.E., Engberg, R.C. 2005. "Strategically Tuned Absolutely Resilient Structures," *Proc. of SEM Annual Conference & Exposition on Experimental and Applied Mechanics*, Portland, Oregon, June 7-9, 2005, Paper No. 222, 14 pages.
2. Ooi, T.K., Engberg, R.C., Gilbert, J.A., Vaughan, R.E., Britton, H.L. 2005. "Modal Analyses of Polymer-Enhanced, Graphite Reinforced Cementitious Composites," *Proc. of SEM Annual*

- Conference & Exposition on Experimental and Applied Mechanics, Portland, Oregon, June 7-9, 2005, Paper No. 224, 11 pages.
3. Biszick, K.R., Gilbert, J.A. 1999. "Designing Thin-Walled, Reinforced Concrete Panels for Reverse Bending," Proc. of the 1999 SEM Spring Conference on Theoretical, Experimental and Computational Mechanics, Cincinnati, Ohio, June 7-9, 1999, pp. 431-434.
 4. Lu, K.J., Kota, S. 2003. "Design of Compliant Mechanisms for Morphing Structural Shapes," Journal of Intelligent Material Systems and Structures, Vol. 14, No. 6, pp. 379-391.
 5. Vaughan, R.E., Gilbert, J.A. 2001. "Analysis of Graphite Reinforced Cementitious Composites," Proc. of the 2001 SEM Annual Conference and Exposition, Portland, Oregon, June 4-6, 2001, pp. 532-535.
 6. Ooi, T.K., Engberg, R.C., Gilbert, J.A., Vaughan, R.E., Bower, M.V. 2004. "Modal Testing of a Lightweight Cementitious Structure," Experimental Techniques, November/December, pp. 37-40.
 7. Ooi, T.K., Gilbert, J.A., Bower, M.V., Vaughan, R.E., Engberg, R.C. 2005. "Modal Analysis of Lightweight Graphite Reinforced Silica/Polymer Matrix Composite Plates," Experimental Mechanics, 45(3), pp. 1-5.
 8. Marotta, S.A., Ooi, T.K., Gilbert, J.A. 2004. "Structural Health Monitoring of Strategically Tuned Absolutely Resilient Structures (STARS)," Proc. of the SEM X International Congress, Costa Mesa, California, June 7-10, Paper No. 172, 6 pages.
 9. Marotta, S.A., Ooi, T.K., Gilbert, J.A., Bower, M.V. 2003. "Remote Readiness Asset Prognostic and Diagnostic System (RRAPDS) Near-Term Applications," Structural Health Monitoring, Ed. Fu-Kuo Chang, Proc. of the 4th International Workshop on Structural Health Monitoring, Stanford University, Stanford, CA, September 15-17, 2003, pp. 757-764.
 10. Marotta, S.A., Kudiya, A.J., Ooi, T.K., Gilbert, J.A. 2005. "Predicting Reliability of Tactical Missiles using RRAPDS and Probabilistic Analyses," Proc. of SEM Annual Conference & Exposition on Experimental and Applied Mechanics, Portland, Oregon, June 7-9, Paper No. 221, 9 pages.
 11. de Vries, M., Nasta, M., Bhatia, V., Tran, T., Greene, J., Claus, R.O., Masri, S. 1995. "Performance of Embedded Short-Gage-Length Optical Fiber Sensors in a Fatigue-Loaded Reinforced Concrete Specimen," Smart Mater. Struct., 4, A107-A113.